

GSM 1800 / UMTS2100 COMBINER


Model : PW-DUP-8028

1、 Part Number: PW-DUP-8028

2、 Name: Dual-band Combiner

	CH1 (Input 1)	CH2 (Input 2)
Frequency range (MHz)	1710~1880	1920~2170
Band-width (MHz)	170	250
Insertion loss (dB)	≤0.5	≤0.5
Ripple in-band (dB)	≤0.3	≤0.5
Rejection (dB)	≥80@CH2	≥80@CH1
Isolation (dB)	≥80@CH2	≥80@CH1
Return loss (dB)	≥20	
Impedance (Ω)	50	
PIM (dBc)	≤-140@+43dBm×2	
Connector	N-F	
Power rating (W)	100	
Temperature (□)	-25~+65	
Size (mm)	240×185×30 (Ver A) 240 x 203 x 52 (ver B)	
Weight (kg)	2.02 (Ver A) / 2.3 (verB)	

3、 Dimension: PW-DUP-8028 Ver A

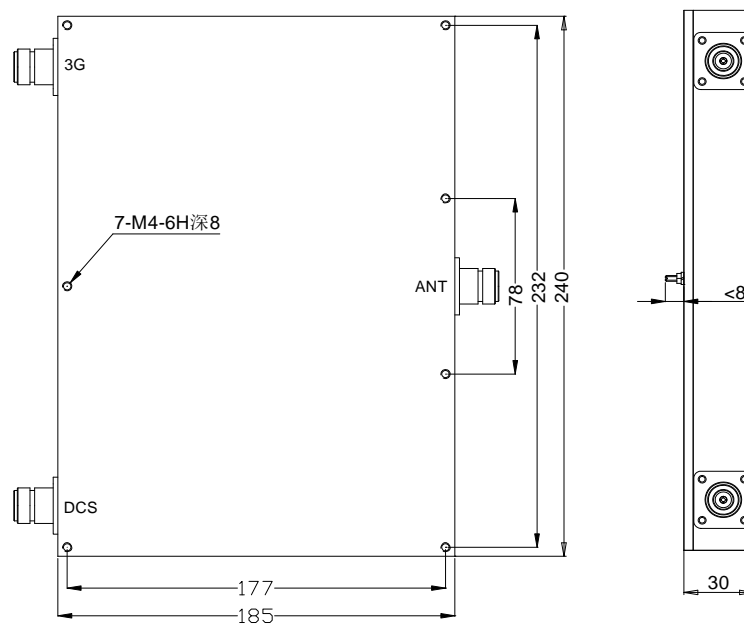

PW-DUP-8028 Ver B

